


# Global Rivets

*Open End, Dome Head*

*Aluminum Rivet with Aluminum Mandrel*  
(5052) (5052)

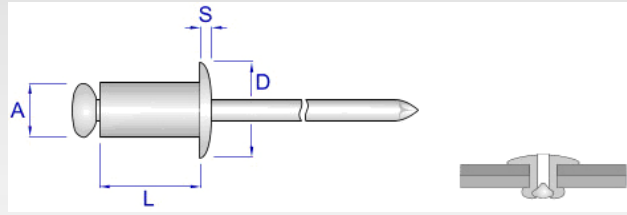

Part #	(A) Rivet Dia	(L) Rivet Length	(D) Flg Dia	(S) Head Height	Grip Range	Shear Strength	Tensile Strength	Drill Bit Size	Box Qty	Box Weight
GR-AA32	3/32	.250	.188	.032	1/32 - 1/8	70 lbs	80 lbs	#41	20,000	
GR-AA34	3/32	.375	.188	.032	1/8 - 1/4	70 lbs	80 lbs	#41	20,000	
GR-AA36	3/32	.500	.188	.032	1/4 - 3/8	70 lbs	80 lbs	#41	20,000	
GR-AA41	1/8	.212	.250	.040	1/32 - 1/16	120 lbs	150 lbs	#30	10,000	
GR-AA42	1/8	.275	.250	.040	1/16 - 1/8	120 lbs	150 lbs	#30	10,000	11 lbs
GR-AA43	1/8	.337	.250	.040	1/8 - 3/16	120 lbs	150 lbs	#30	10,000	
GR-AA44	1/8	.400	.250	.040	3/16 - 1/4	120 lbs	150 lbs	#30	10,000	13 lbs
GR-AA45	1/8	.462	.250	.040	1/4 - 5/16	120 lbs	150 lbs	#30	10,000	
GR-AA46	1/8	.525	.250	.040	5/16 - 3/8	120 lbs	150 lbs	#30	10,000	14 lbs
GR-AA48	1/8	.650	.250	.040	3/8 - 1/2	120 lbs	150 lbs	#30	10,000	15 lbs
GR-AA410	1/8	.775	.250	.040	1/2 - 5/8	120 lbs	150 lbs	#30	8,000	
GR-AA412	1/8	.901	.250	.040	5/8 - 3/4	120 lbs	150 lbs	#30	6,000	
GR-AA52	5/32	.300	.312	.050	1/32 - 1/8	190 lbs	230 lbs	#20	8,000	15 lbs
GR-AA53	5/32	.362	.312	.050	1/8 - 3/16	190 lbs	230 lbs	#20	8,000	
GR-AA54	5/32	.425	.312	.050	3/16 - 1/4	190 lbs	230 lbs	#20	8,000	17 lbs
GR-AA55	5/32	.487	.312	.050	1/4 - 5/16	190 lbs	230 lbs	#20	8,000	
GR-AA56	5/32	.550	.312	.050	5/16 - 3/8	190 lbs	230 lbs	#20	6,000	14 lbs
GR-AA58	5/32	.675	.312	.050	3/8 - 1/2	190 lbs	230 lbs	#20	6,000	
GR-AA510	5/32	.800	.312	.050	1/2 - 5/8	190 lbs	230 lbs	#20	6,000	
GR-AA512	5/32	.925	.312	.050	5/8 - 3/4	190 lbs	230 lbs	#20	5,000	
GR-AA62	3/16	.325	.375	.060	1/32 - 1/8	260 lbs	320 lbs	#11	5,000	15 lbs
GR-AA63	3/16	.387	.375	.060	1/8 - 3/16	260 lbs	320 lbs	#11	5,000	
GR-AA64	3/16	.450	.375	.060	3/16 - 1/4	260 lbs	320 lbs	#11	5,000	16 lbs
GR-AA65	3/16	.513	.375	.060	1/4 - 5/16	260 lbs	320 lbs	#11	5,000	
GR-AA66	3/16	.575	.375	.060	5/16 - 3/8	260 lbs	320 lbs	#11	5,000	18 lbs
GR-AA68	3/16	.700	.375	.060	3/8 - 1/2	260 lbs	320 lbs	#11	4,000	16 lbs
GR-AA610	3/16	.825	.375	.060	1/2 - 5/8	260 lbs	320 lbs	#11	4,000	18 lbs
GR-AA612	3/16	.950	.375	.060	5/8 - 3/4	260 lbs	320 lbs	#11	4,000	20 lbs
GR-AA614	3/16	1.075	.375	.060	3/4 - 7/8	260 lbs	320 lbs	#11	3,000	
GR-AA616	3/16	1.200	.375	.060	7/8 - 1	260 lbs	320 lbs	#11	3,000	
GR-AA84	1/4	.500	.500	.080	1/32 - 1/4	460 lbs	560 lbs	F	2,000	14 lbs
GR-AA86	1/4	.625	.500	.080	1/4 - 3/8	460 lbs	560 lbs	F	2,000	15 lbs
GR-AA88	1/4	.750	.500	.080	3/8 - 1/2	460 lbs	560 lbs	F	2,000	16 lbs
GR-AA810	1/4	.875	.500	.080	1/2 - 5/8	460 lbs	560 lbs	F	2,000	16 lbs
GR-AA812	1/4	1.000	.500	.080	5/8 - 3/4	460 lbs	560 lbs	F	2,000	
GR-AA814	1/4	1.125	.500	.080	3/4 - 7/8	460 lbs	560 lbs	F	1,500	
GR-AA816	1/4	1.250	.500	.080	7/8 - 1	460 lbs	560 lbs	F	1,500	

*Conform to IFI-114 Grade 11 Standards*  
*Compliant to RoHS Standards*  
*ISO 9001:2000*