


Global Rivets

Open End, Dome Head

Aluminum Rivet with Steel Mandrel
(5052)

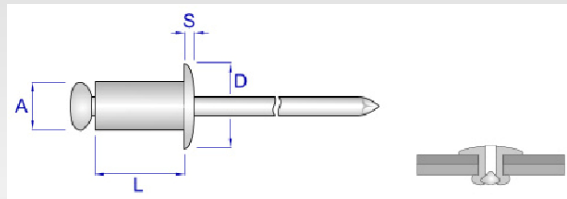

Part #	(A) Rivet Dia	(L) Rivet Length	(D) Flg Dia	(S) Head Height	Grip Range	Shear Strength	Tensile Strength	Drill Bit Size	Box Qty	Box Weight
GR-AS32	3/32	.250	.188	.032	1/32 - 1/8	70 lbs	80 lbs	#41	20,000	
GR-AS34	3/32	.375	.188	.032	1/8 - 1/4	70 lbs	80 lbs	#41	20,000	
GR-AS36	3/32	.500	.188	.032	1/4 - 3/8	70 lbs	80 lbs	#41	20,000	
GR-AS41	1/8	.212	.250	.040	1/32 - 1/16	120 lbs	150 lbs	#30	10,000	
GR-AS42	1/8	.275	.250	.040	1/16 - 1/8	120 lbs	150 lbs	#30	10,000	23 lbs
GR-AS43	1/8	.337	.250	.040	1/8 - 3/16	120 lbs	150 lbs	#30	10,000	
GR-AS44	1/8	.400	.250	.040	3/16 - 1/4	120 lbs	150 lbs	#30	10,000	25 lbs
GR-AS45	1/8	.462	.250	.040	1/4 - 5/16	120 lbs	150 lbs	#30	10,000	
GR-AS46	1/8	.525	.250	.040	5/16 - 3/8	120 lbs	150 lbs	#30	10,000	27 lbs
GR-AS48	1/8	.650	.250	.040	3/8 - 1/2	120 lbs	150 lbs	#30	10,000	30 lbs
GR-AS410	1/8	.775	.250	.040	1/2 - 5/8	120 lbs	150 lbs	#30	8,000	
GR-AS412	1/8	.901	.250	.040	5/8 - 3/4	120 lbs	150 lbs	#30	6,000	
GR-AS52	5/32	.300	.312	.050	1/32 - 1/8	190 lbs	230 lbs	#20	8,000	29 lbs
GR-SS53	5/32	.362	.312	.050	1/8 - 3/16	190 lbs	230 lbs	#20	8,000	
GR-AS54	5/32	.425	.312	.050	3/16 - 1/4	190 lbs	230 lbs	#20	8,000	30 lbs
GR-AS55	5/32	.487	.312	.050	1/4 - 5/16	190 lbs	230 lbs	#20	8,000	
GR-AS56	5/32	.550	.312	.050	5/16 - 3/8	190 lbs	230 lbs	#20	6,000	24. lbs
GR-AS58	5/32	.675	.312	.050	3/8 - 1/2	190 lbs	230 lbs	#20	6,000	
GR-AS510	5/32	.800	.312	.050	1/2 - 5/8	190 lbs	230 lbs	#20	6,000	
GR-AS512	5/32	.925	.312	.050	5/8 - 3/4	190 lbs	230 lbs	#20	5,000	
GR-AS62	3/16	.325	.375	.060	1/32 - 1/8	260 lbs	320 lbs	#11	5,000	28 lbs
GR-AS63	3/16	.387	.375	.060	1/8 - 3/16	260 lbs	320 lbs	#11	5,000	
GR-AS64	3/16	.450	.375	.060	3/16 - 1/4	260 lbs	320 lbs	#11	5,000	30 lbs
GR-AS65	3/16	.513	.375	.060	1/4 - 5/16	260 lbs	320 lbs	#11	5,000	
GR-AS66	3/16	.575	.375	.060	5/16 - 3/8	260 lbs	320 lbs	#11	5,000	33 lbs
GR-AS68	3/16	.700	.375	.060	3/8 - 1/2	260 lbs	320 lbs	#11	4,000	29 lbs
GR-AS610	3/16	.825	.375	.060	1/2 - 5/8	260 lbs	320 lbs	#11	4,000	33 lbs
GR-AS612	3/16	.950	.375	.060	5/8 - 3/4	260 lbs	320 lbs	#11	4,000	34 lbs
GR-AS614	3/16	1.075	.375	.060	3/4 - 7/8	260 lbs	320 lbs	#11	3,000	
GR-AS616	3/16	1.200	.375	.060	7/8 - 1	260 lbs	320 lbs	#11	3,000	
GR-AS84	1/4	.500	.500	.080	1/32 - 1/4	460 lbs	560 lbs	F	2,000	27 lbs
GR-AS86	1/4	.625	.500	.080	1/4 - 3/8	460 lbs	560 lbs	F	2,000	28 lbs
GR-AS88	1/4	.750	.500	.080	3/8 - 1/2	460 lbs	560 lbs	F	2,000	31 lbs
GR-AS810	1/4	.875	.500	.080	1/2 - 5/8	460 lbs	560 lbs	F	2,000	
GR-AS812	1/4	1.000	.500	.080	5/8 - 3/4	460 lbs	560 lbs	F	2,000	
GR-AS814	1/4	1.125	.500	.080	3/4 - 7/8	460 lbs	560 lbs	F	1,500	
GR-AS816	1/4	1.250	.500	.080	7/8 - 1	460 lbs	560 lbs	F	1,500	31 lbs

Conform to IFI-114 Grade 18 Standards

Compliant to RoHS Standards

ISO 9001:2000